
Buzzers

19

# Selection diagram

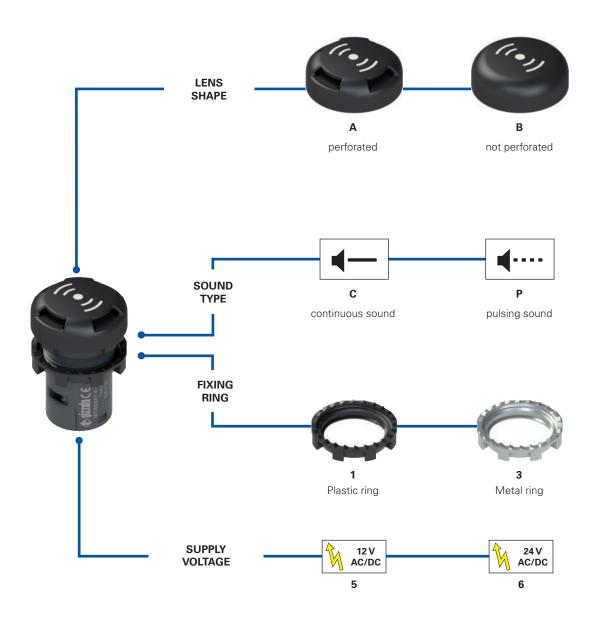

# Code structure

Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

# E6 <u>1</u>IS<u>6A</u>1<u>C</u>V1B

## Fixing ring and shaped ring

- 1 Plastic ring
- 2 Plastic fixing ring and shaped ring
- 3 Metal ring
- 4 Metal fixing ring and shaped ring

# Supply voltage

- 5 12 Vac/dc
- 6 24 Vac/dc

#### Sound type

**C** continuous sound

P pulsing sound

#### Lens shape

A perforated

B not perforated



#### Main features

- Buzzer fully integrated in a reduced-size monolithic body
- Protection degree up to IP67 and IP69K
- Continuous sound and pulsed sound versions
- High sound intensity
- 12 Vac/dc or 24 Vac/dc versions



UL approval: EAC approval: E131787 RU C-IT.YT03.B.00035/19

# **Technical data**

**General data** Protection degree: Version with perforated lens: Version with perforation-free lens:

Ambient temperature: Tightening torque of the terminal screws: Tightening torque of the fixing ring: Utilization requirements:

#### Electrical data

Operating voltage U<sub>n</sub>: Supply voltage tolerance: Operating current: Minimum level of sound intensity: 24 Vac/dc versions:

12 Vac/dc versions:

Frequency of intermittence (pulsed version): Cable cross section:

Cable stripping length (x):

IP40 acc. to EN 60529 IP67 acc. to EN 60529 IP69K acc. to ISO 20653 (with shaped ring VE GP12H1A or label holder VE PT32A00A0) -20 °C ... +70 °C 0.8 ... 1 Nm 2 ... 2.5 Nm see page 149

12 Vac/dc or 24 Vac/dc ±15% of U<sub>n</sub> 10 mA

95 dB at 10cm (perforated lens) 80 dB at 10cm (perforation-free lens) 90 dB at 10cm (perforated lens) 75 dB at 10cm (perforation-free lens) 0.6 Hz (0.8 s ON, 0.8 s OFF) min 1 x 0.34 mm<sup>2</sup> (1 x AWG 22) max. 2 x 1.5 mm<sup>2</sup> (2 x AWG 16) 6 mm



#### In compliance with standards:

IEC 60947-1, IEC 60947-5-1, IEC 60204-1, EN 60947-1, EN 60947-5-1, EN 60204-1, EN 50581, UL 508, CSA 22-2 N°14.

#### Compliance with the requirements of:

Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU.

# Features approved by UL

Ratings: 12 Vac/dc or 24 V ac/dc (Supplied by class 2 or limited energy external power supply source)

- E6 xISxAxxxxx "For Use on a Flat Surface of a Type 1"

- E6 xISxBxxxxx "For Use on a Flat Surface of a Type 1, 4X, 12 and 13"
- Wire range 16-22 AWG

The tightening torque of the Terminals Block is 0.8 - 1.0 Nm

19

19

# **General data**

## **Protection degrees IP67 and IP69K**

IP69K IP67

These devices are designed to be used in the toughest environmental conditions and they pass the IP67 immersion test acc. to EN 60529. They can therefore be used in all environments where maximum protection is required. Due to their special design, these

degree of the housing is required. Due to their special design, these devices are suitable for use in equipment subjected to cleaning with high pressure hot water jets. These devices meet the IP69K test requirements according to ISO 20653 (water jets with 100 bar and 80°C).

#### Two sound types



The E6 buzzer combines compact external dimensions with a high sound intensity, in particular in the versions with perforated lens. This characteristic makes the signalling clearly noticeable, even at a distance and in noisy environments.

To diversify the type of indication provided, there are two different types of acoustic warning available: continuous sound or pulsing sound.


# **Selection table**

Lens shape	Sound type and supply voltage			
	Continuous sound ◀──		Pulsing sound ╡╴ ─	
	12 Vac/dc	24 Vac/dc	12 Vac/dc	24 Vac/dc
perforated	E6 1IS5A1CV1B	E6 1IS6A1CV1B	E6 1IS5A1PV1B	E6 1IS6A1PV1B
((•)) not perforated	E6 1IS5B1CV1B	E6 1IS6B1CV1B	E6 1IS5B1PV1B	E6 1IS6B1PV1B

# Dimensions

All values in the drawings are in mm

# Minimum distances for installation



## Integrated screw connection

The shape of the type E6 sound indicator, though very compact, allows the integration on the device of all components for proper installation and functioning. All that is required is to wire the device by means of its screw terminals in a quick and intuitive way. There is no need to install further components.

