

718 Ex Electronic Installation Buzzer



Cap (accessory)



Zener Barrier (accessory)


① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

| | | | | | |
|--------------------------------------|---------------------------------------|------------------------------|-------------|-------------|-------------|
| Dimensions (Ø x Height): | 43 mm x 14 mm (Protrusion from panel) | | | | |
| Housing: | PC/ABS-Blend | | | | |
| Connection: | Spades 6.3 x 0.8 mm | | | | |
| Tone frequency: | c. 2,400 Hz | | | | |
| Duty cycle: | 100 % | | | | |
| Explosion protection: | Ex II 2G Ex ib IIC T4 / T5 / T6 Gb | | | | |
| Approval: | DMT 98 ATEX E 005 X | | | | |
| Maximum values of the Zener barrier: | Ui: 40 V DC, Ii: 660 mA | | | | |
| Minimum values of the Zener barrier: | For 24 V DC 15 V DC/ 20 mA | | | | |
| Maximum Input Power Pi: | Temp.- classes | Max. surrounding temperature | | | |
| | | + 40°C | + 50°C | + 60°C | |
| | | T4 | Pi = 1.3 W | Pi = 1.2 W | Pi = 1.0 W |
| | | T5 | Pi = 0.82 W | Pi = 0.66 W | Pi = 0.52 W |
| T6 | Pi = 0.6 W | Pi = 0.45 W | Pi = 0.3 W | | |
| Voltage: | 24 V DC | | | | |
| Current consumption: | 20 mA | | | | |
| Order No.: | 718 000 55 | | | | |

✳ ACCESSORIES:

| | |
|--------------------------|-------------------|
| PC/ABS-Blend Cap (IP 43) | 975 118 00 |
| Zener Barrier | 975 714 01 |


↔ TECHNICAL DIAGRAM:

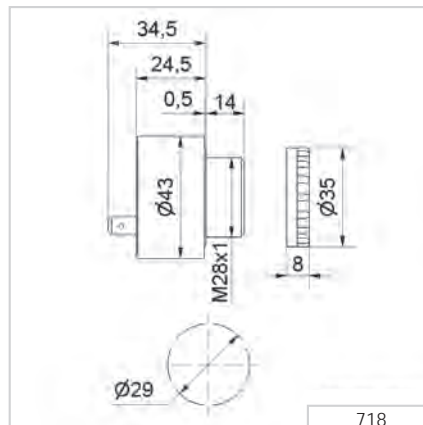

718

Signalisation index

Continuous tone 4



with cap

