

Alarm Bell

Signalisation index	
Audible	
Alarm Bell	5

Your benefits

A signalling technology classic: The robust WERMA Alarm Bell for signalling break-time or machine activation warnings.

- Many application possibilities
- Robust housing prevents damage when used in public areas or in harsh industrial environments

Typical applications

As a bell or alarm

- Goods receiving areas
- Entry/exit applications
- Counter service call point, etc.

Installation options

- Wall mounting

Features

- High IP66 protection rating for outdoor use

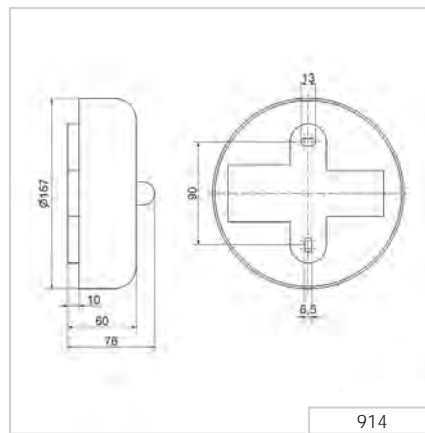




i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:







Dimensions (Ø x Depth):	1 67 mm x 76 mm		
Housing:	Steel bell, epoxy dust enamelled		
Connection:	Screw terminal max. 1.5 mm ²		
Cable entry:	Cable gland M16 x 1.5 mm Cable diameter 5-10 mm		
Voltage:	24 V DC	110 V AC (50/60 Hz)	230 V AC
Current consumption:	300 mA	90 mA	55 mA
Order No.:	914 052 55	914 052 67	914 052 68 (50 Hz)
Order No.:			914 053 68 (60 Hz)

TECHNICAL DIAGRAM:



Signalisation index	
Alarm bell	5

See note on page 347







 at DC - 98 dB(A)
 at AC - 100 dB(A)