

Module for emergency stops, end position monitoring for movable guards, OSSD semiconductor outputs and magnetic safety sensors

Main features

- For safety applications up to SIL CL 3/PL e
- Input with 1 or 2 channels
- Choice between automatic start, manual start (CS AR-05 only) or monitored start (CS AR-06 only)
- Can be connected to OSSD semiconductor outputs, to electromechanical contacts or to magnetic safety sensors
- Output contacts: 3 NO safety contacts, 1 NC auxiliary contact
- Supply voltage: 24 Vac/dc, 120 Vac, 230 Vac

Utilization categories

Alternating current: AC15 (50...60 Hz) Ue (V) 230

le (A)

Direct current: DC13 (6 oper. cycles/min.)

Ue (V) 24 le (A)

Quality marks:

EC type examination certificate: IMQ CP 432 DM

UL approval: E131787

CCC approval: 2013010305640211 RU C-IT.YT03.B.00035/19 EAC approval:

Compliance with the requirements of:

Machinery Directive 2006/42/EC, EMC Directive 2014/30/EC, RoHS Directive 2011/65/EU.

Technical data

Housing

Polyamide housing PA 66, self-extinguishing V0 acc. to UL 94

IP40 (housing), IP20 (terminal strip) Protection degree acc. to EN 60529: Dimensions: see page 317, design A

General data

SIL level (SIL CL) up to: SIL CL 3 acc. to EN 62061 Performance Level (PL) up to: PL e acc. to EN ISO 13849-1 Safety category up to: cat. 4 acc. to EN ISO 13849-1 Safety parameters: see page 375

Ambient temperature: -25°C...+55°C >10 million operating cycles Mechanical endurance:

Electrical endurance: >100,000 operating cycles Pollution degree: external 3, internal 2

Rated impulse withstand voltage (U___): 250 V Rated insulation voltage (U.): Overvoltage category:

24 Vac/dc: 50...60 Hz Rated supply voltage (U_): 120 Vac; 50...60 Hz 230 Vac; 50...60 Hz

Max. DC residual ripple in DC: 10% Supply voltage tolerance: ±15% of U < 5 VA Power consumption AC: Power consumption DC: < 2 W

Control circuit

Protection against short circuits: PTC resistance, Ih=0.5 A

PTC times: Response time > 100 ms, release time > 3 s

Maximum resistance per input: < 50 O Current per input: < 30 mAMin. duration of start impulse t_{MIN}: > 250 ms< 200 ms Response time t_a: Release time t_{R1} : $< 15 \, \mathrm{ms}$ Release time in absence of power supply t_p: < 70 msunlimited Simultaneity time t_c:

In compliance with standards:

EN 60204-1, EN ISO 13855, EN 1037, EN ISO 12100, EN ISO 13850, EN 60529, EN 61000-6-2, EN 61000-6-3, EN 61326-1, EN 60664-1, EN 60947-1, EN 50581, EN ISO 13849-1, EN ISO 13849-2, EN 62061, UL 508, CSA C22.2 n° 14-95, GB/T14048 5-2017

Output circuit

3 NO safety contacts Output contacts: 1 NC auxiliary contact Contact type: forcibly guided

gold-plated silver alloy Material of the contacts: Maximum switching voltage: 230/240 Vac; 300 Vdc

Max. current per contact: Conventional free air thermal current I_{th}: 6 A Max. total current ΣI_{th}^2 : 64 A² Minimum current: 10 mA Contact resistance: $< 100 \text{ m}\Omega$ External protection fuse: 4 A

The number and the load capacity of output contacts can be increased by using expansion modules or contactors. See pages 263-272.

Code structure

CS AR-05V024

Start mode

05 manual or automatic start

06 monitored start

Connection type

Screw terminals

Connector with screw terminals

X Connector with spring terminals

Supply voltage

024 24 Vac/dc

120 120 Vac

230 Vac

Features approved by UL

Rated supply voltage (U_n): 24 Vac/dc; 50...60 Hz

120 Vac; 50...60 Hz 230 Vac; 50...60 Hz

Power consumption AC: < 5 VA Power consumption DC: < 4 W 230/240 Vac Electrical ratings:


6 A general use C300 pilot duty

- Use 60 or 75°C copper (Cu) conductor and wire size No. 30-12 AWG, stranded or solid.
 - The terminal tightening torque of 5-7 lb in.
- Only for 24 Vac/dc versions: supply from remote Class 2 source or limited voltage limited energy




Safety module CS AR-05 / CS AR-06

Pin assignment




Internal block diagram

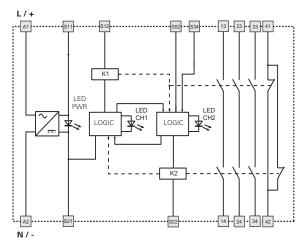


Function diagrams


Configuration with automatic start (CS AR-05 only)

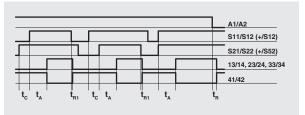

Configuration with monitored start (CS AR-06 only)

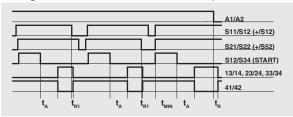

Configuration with manual start (CS AR-05 only)

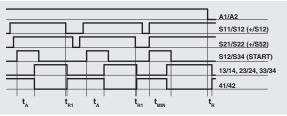


 $\mathbf{t}_{\mathbf{MN}}$. Min. duration of start impulse $\mathbf{t}_{\mathbf{c}}$: simultaneity time $\mathbf{t}_{\mathbf{A}}$: response \mathbf{t}

release time in absence of power supply

The configurations with one channel are obtained taking into consideration the CH1 input only. In this case it is necessary to consider time $\mathbf{t}_{\mathbf{R}1}$ referred to input CH1, time $\mathbf{t}_{\mathbf{R}}$ referred to the supply, time $\mathbf{t}_{\mathbf{A}}$ referred to input CH1 and to the start, and time \mathbf{t}_{min} referred to the start.

Input configuration

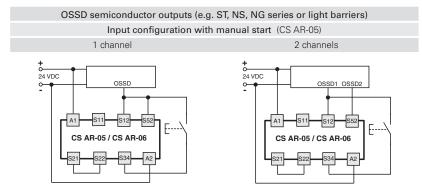

Automatic start (CS AR-05 only)


Bridge the start button between S12 and S34 in order to activate the automatic start module.




Monitored start

Use module CS AR-06 with the circuit diagrams for manual start.

Emergency stop circuits Input configuration with manual start (CS AR-05) 1 channe






Monitoring of movable guards and magnetic safety sensors

The safety module can monitor emergency stop circuits, control circuits for movable guards as well as magnetic safety sensors. Replace the emergency stop contacts with switch contacts or sensor contacts. The sensors can only be used in 2-channel configuration.





The diagram does not show the exact position of the terminals in the product

Application examples See page 273