



Bracket mounting with cable gland

## EvoSIGNAL Mini - Horns & Sirens


### ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	62 mm x 85 mm		
Housing:	PC/ABS		
Lens:	PC, grey		
Fixing:	Base/Tube/Wall and Inatallation mounting		
Cable entry:	Cable diameter 8-12 mm		
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>		
Tone type:	Pulse or Permanent tone		
Voltage:	12 V AC/DC	24 V AC/DC	115-230 V AC
Current consumption:	≤ 30 mA	≤ 40 mA	≤ 30 mA
Order no.	<b>160 700 74</b>	<b>160 700 75</b>	<b>160 700 60</b>

### ✂ ACCESSORIES:

Base mounting	<b>260 700 01</b>
Installation mounting M22	<b>260 700 03</b>
Installation mounting PG 29	<b>260 700 04</b>
Tube mounting	<b>260 700 05</b>
Bracket mounting with cable gland	<b>260 700 06</b>
Bracket mounting	<b>260 700 07</b>

### ↔ TECHNICAL DIAGRAM:

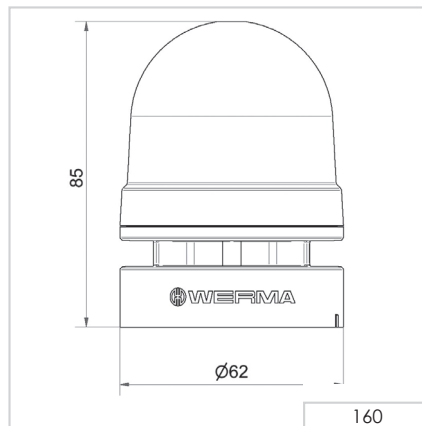

160

260.700.01

260.700.03

260.700.04

260.700.05  
260.700.06

260.700.07

Signalisation index	
Permanent	5
Pulse	6