

# EvoSIGNAL Midi - Combinations



Horn



Bracket mounting with cable gland



Tube mounting

## ① TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

Dimensions (Ø x Height):	85 mm x 130 mm
Housing:	PC/ABS
Lens:	PC, transparent
Fixing:	Base/Tube/Wall mounting
Cable entry:	Cable diameter 8-12 mm
Connection:	Push-In terminal max. 1.5 mm <sup>2</sup>
Tone type:	Multi-tone, 10 tones
Flashing/Blinking frequency:	1 Hz

### TwinLIGHT

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 345 mA	≤ 170 mA
red	<b>461 110 70</b>	<b>461 110 60</b>
green	<b>461 210 70</b>	<b>461 210 60</b>
yellow	<b>461 310 70</b>	<b>461 310 60</b>
white	<b>461 410 70</b>	<b>461 410 60</b>
blue	<b>461 510 70</b>	<b>461 510 60</b>


### TwinFLASH

Voltage:	12/24 V AC/DC	115-230 V AC
Current consumption:	≤ 110 mA	≤ 215 mA
red	<b>461 120 70</b>	<b>461 120 60</b>
green	<b>461 220 70</b>	<b>461 220 60</b>
yellow	<b>461 320 70</b>	<b>461 320 60</b>
white	<b>461 420 70</b>	<b>461 420 60</b>
blue	<b>461 520 70</b>	<b>461 520 60</b>

## ✖ ACCESSORIES:

Base mounting	<b>261 700 01</b>
Base mounting with cable gland	<b>261 700 02</b>
Tube mounting	<b>261 700 05</b>
Bracket mounting with cable gland	<b>261 700 07</b>
Bracket mounting	<b>261 700 06</b>
Horn	<b>261 700 03</b>

## ↔ TECHNICAL DIAGRAM:

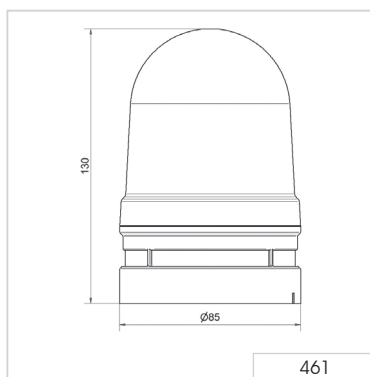

Signalisation index	
TwinLIGHT	<b>6</b>
TwinFLASH	<b>8</b>
Continuous	<b>7</b>
Pulse	<b>8</b>

