



LED Permanent Beacon 201 (base mounting)



LED Permanent Beacon 204 with integrated mounting bracket


i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

	Base mounting 201	Bracket mounting 204
Dimensions (Ø x Height):	58 mm x 81 mm	58 mm x 107 mm
Housing:	PA-GF, high impact	
Lens:	PC, transparent; Ring: PC	
Connection:	CAGE CLAMP® technology max. 1.5 mm ²	
Cable entry:	Cable diameter max. 10 mm	Cable diameter 3-6 mm
Fixing:	Base mounting with flat seal	Bracket mounting incl. cable gland M 12 x 1.5 mm
Life duration:	Up to 100,000 hrs	

Base mounting 201			
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	45 mA	25 mA	25 mA
red	201 100 75	201 100 67	201 100 68
green	201 200 75	201 200 67	201 200 68
yellow	201 300 75	201 300 67	201 300 68

Bracket mounting 204			
Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	45 mA	25 mA	25 mA
red	204 100 75	204 100 67	204 100 68
green	204 200 75	204 200 67	204 200 68
yellow	204 300 75	204 300 67	204 300 68

TECHNICAL DIAGRAMS:

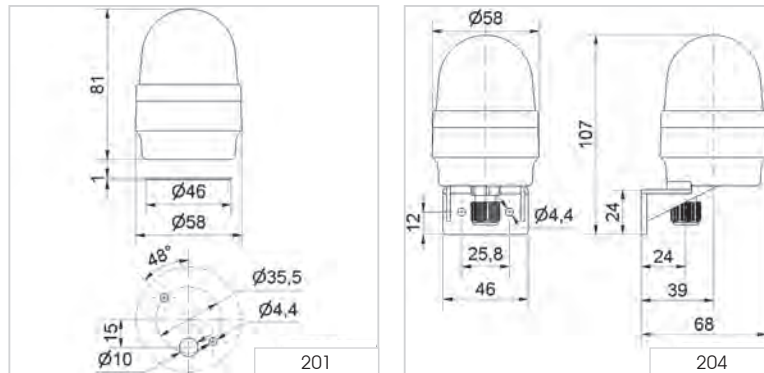

Signalisation index	
LED Permanent Light	3

