



Flashing Beacon 202 (base mounting)



Flashing Beacon 205 with integrated mounting bracket



Housing with CAGE CLAMP® connection

**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

	Base mounting 202	Bracket mounting 205
Dimensions (Ø x Height):	58 mm x 81 mm	58 mm x 107 mm
Housing:	PA-GF, high impact	
Lens:	PC, transparent; Ring: PC	
Connection:	CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 10 mm	Cable diameter 3-6 mm
Fixing:	Base mounting with flat seal	Bracket mounting ncl. cable gland M12 x 1.5 mm
Flash frequency:	C. 0.75 Hz	
Flash energy:	1 Ws	
Life duration:	4 x 10 <sup>6</sup> flashes	


**Base mounting 202**

Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>202 100 55</b>	<b>202 100 67</b>	<b>202 100 68</b>
yellow	<b>202 300 55</b>	<b>202 300 67</b>	<b>202 300 68</b>

**Bracket mounting 205**

Voltage:	24 V AC/DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>205 100 55</b>	<b>205 100 67</b>	<b>205 100 68</b>
yellow	<b>205 300 55</b>	<b>205 300 67</b>	<b>205 300 68</b>

**TECHNICAL DIAGRAM:**

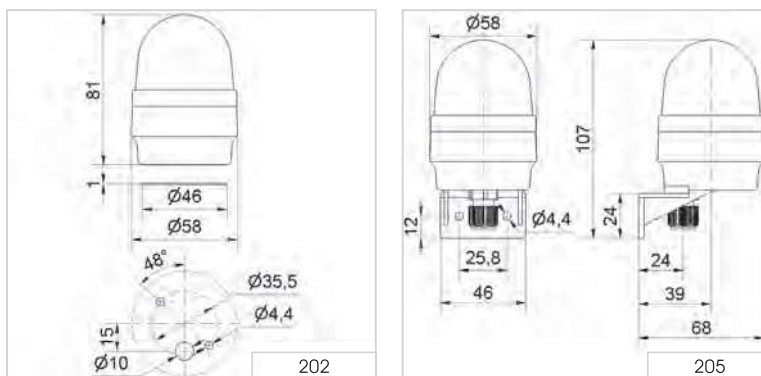

**Signalisation index**

Xenon Flashing Light 4

Base mounting      Bracket mounting

