



Flashing Beacon 222 (base mounting)



Flashing Beacon 225 with integrated mounting bracket

**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

	Base mounting 222	Bracket mounting 225
Dimensions (Ø x Height):	75 mm x 79 mm	75 mm x 105 mm
Housing:	PA-GF, high impact	
Lens:	PC, transparent; Ring: PC/ABS-Blend	
Connection:	CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>	
Cable entry:	Cable diameter max. 10 mm	Cable diameter 3-6 mm
Fixing:	Base mounting with flat seal	Bracket mounting incl. cable gland M12 x 1.5 mm
Flash frequency:	C. 0.75 Hz	
Flash energy:	1 Ws	
Life duration:	4 x 10 <sup>6</sup> flashes	


**Base mounting 222**

Voltage:	24 V DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>222 100 55</b>	<b>222 100 67</b>	<b>222 100 68</b>
yellow	<b>222 300 55</b>	<b>222 300 67</b>	<b>222 300 68</b>

**Bracket mounting 225**

Voltage:	24 V DC	115 V AC	230 V AC
Current consumption:	100 mA	20 mA	30 mA
red	<b>225 100 55</b>	<b>225 100 67</b>	<b>225 100 68</b>
yellow	<b>225 300 55</b>	<b>225 300 67</b>	<b>225 300 68</b>
blue	<b>225 500 55</b>	<b>225 500 67</b>	<b>225 500 68</b>

**TECHNICAL DIAGRAMS:**

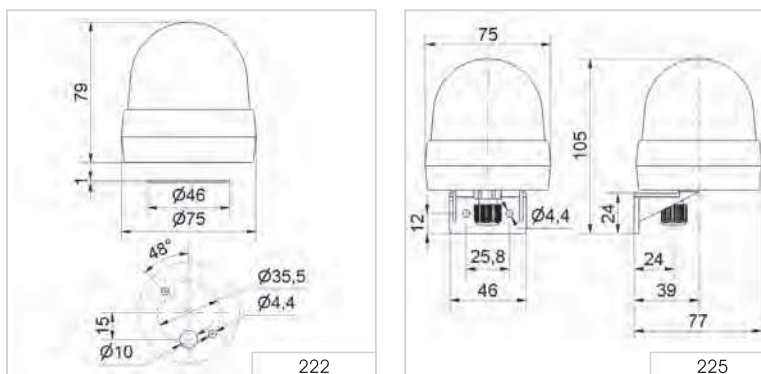

**Signalisation index**

Xenon Flashing Light	4
----------------------	---

Base mounting: 124 g, Bracket mounting: 130 g

