



Accessories

**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

<b>Dimensions (Ø x Height):</b>	57 mm x 87 mm
<b>Housing:</b>	PA-GF, high impact
<b>Lens:</b>	PC, transparent
<b>Connection:</b>	CAGE CLAMP® technology max. 1.5 mm <sup>2</sup>
<b>Cable entry:</b>	Cable diameter max. 11 mm
<b>Fixing:</b>	Tube mounting M25 x 1.5 mm
<b>Operating voltage:</b>	12-230 V
<b>Bulb socket:</b>	BA15d, 7 Watt max.
<b>Bulb change:</b>	Via removal of lens

Bulb not included in assembly.

<b>Voltage:</b>	12-240 V
red	<b>209 100 00</b>
green	<b>209 200 00</b>
yellow	<b>209 300 00</b>
clear	<b>209 400 00</b>
blue	<b>209 500 00</b>

**ACCESSORIES:**


Base with integrated tube 110 mm long, M25 x 1.5 mm	<b>975 209 01</b>
--	-------------------

Cable gland M25 x 1.5 mm	<b>975 209 02</b>
-----------------------------	-------------------

Bulb BA15d, 5 W, total length 42 mm					
<b>Voltage:</b>	12 V AC/DC	24 V AC/DC	30 V AC/DC	115 V AC/DC	230 V AC/DC
	<b>955 840 34</b>	<b>955 840 35</b>	<b>955 840 32</b>	<b>955 840 57</b>	<b>955 840 38</b>

LED bulb BA15d total length 42 mm					
<b>Voltage:</b>	24 V AC/DC			115 V AC	230 V AC
<b>Current consumption:</b>	< 45 mA			< 15 mA	< 15 mA
red	<b>956 100 75</b>			<b>956 100 67</b>	<b>956 100 68</b>
green	<b>956 200 75</b>			<b>956 200 67</b>	<b>956 200 68</b>
yellow	<b>956 300 75</b>			<b>956 300 67</b>	<b>956 300 68</b>
white	<b>956 400 75</b>			<b>956 400 67</b>	<b>956 400 68</b>
blue	<b>956 500 75</b>			<b>956 500 67</b>	<b>956 500 68</b>

**TECHNICAL DIAGRAM:**

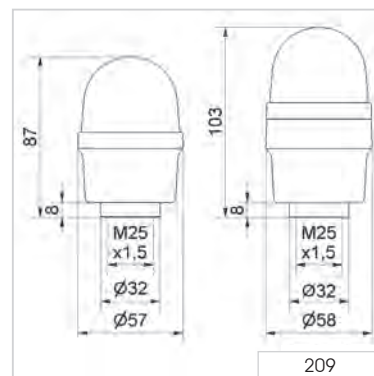

**Signalisation index**

Permanent Light   2

