



LED Installation Beacon  
(Multicolour)



LED Installation Beacon  
(Multicolour) with raised lens



Five colours in one beacon:  
red, yellow, green, white and blue



#### TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:

<b>Dimensions</b> (Ø x Height):	50 mm x 22 mm (Protrusion from panel) 50 mm x 31 mm (Protrusion from panel)
<b>Housing:</b>	PC/ABS-Blend, black
<b>Lens:</b>	PC, transparent
<b>Fixing:</b>	Installation mounting for Ø 22.5 mm (M22 x 1.5 mm)
<b>Connection:</b>	Screw terminal max. 0.5 mm <sup>2</sup> (239 480 55) Push In max. 1.5 mm <sup>2</sup> (239 482 55)
<b>Colour options:</b>	Red, yellow, green, white, blue (multicolour)
<b>Life duration:</b>	Up to 50,000 hrs
Nut and seal included in assembly.	

<b>Voltage:</b>	24 V DC
<b>Current consumption:</b>	Max. 75 mA
Low lens, clear	<b>239 480 55</b>
Raised lens, opaque	<b>239 482 55</b>



#### ADDITIONAL INFORMATION:



The LED beacon 239 is suitable for applications on machines or in control panels.

The LED installation beacon (multicolour) can be single-hole mounted with ease thanks to its M22 installation dimensions.

X1	X2	X3	X4	X5	Colour
			nc	COM	OFF
		24V DC	nc	COM	RD
	24V DC		nc	COM	GN
	24V DC	24V DC	nc	COM	YE
24V DC			nc	COM	BU
24V DC	24V DC	24V DC	nc	COM	WH



#### TECHNICAL DIAGRAMS:

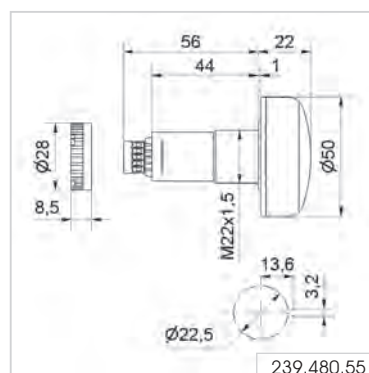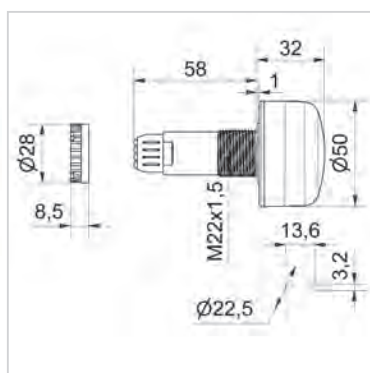

239.480.55

239.482.55

#### Signalisation index

LED Permanent Light  
(multicolour)

