



Base mounting



The adaptor (accessory) allows quick and simple mounting on a tube



Wall mounting


**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

	<b>Base/Tube mounting</b>		<b>Wall mounting</b>	
<b>Dimensions (Ø x Height):</b>	89 mm x 100,5 mm (Base mount.)		-	
<b>Dimensions (L x H x W):</b>	-		83 mm x 120,5 mm x 91 mm	
<b>Housing:</b>	PC, black		PC/ABS-Blend; PC grey	
<b>Lens:</b>	PC, transparent			
<b>Connection:</b>	Connector plug with screw terminal max. 1.5 mm <sup>2</sup>			
<b>Cable entry:</b>	Cable diameter max. 9 mm			
<b>Life duration:</b>	Up to 50,000 hrs			
<b>Tone type:</b>	Continuous tone or pulse tone, adjustable 12 V: only continuous tone			
<b>Tone frequency:</b>	2,3 kHz (c. 3,3 kHz at 12 V)			
<b>Fixing:</b>	Tube mounting via accessory	Sound outlet facing downwards		
<b>Voltage:</b>	12 V DC	24 V AC/DC	115 V AC	230 V AC
<b>Current consumption LED:</b>	80 mA	45 mA	25 mA	25 mA
<b>Current consumption Buzzer:</b>	40 mA	15 mA	15 mA	25 mA
<b>Base/Tube mounting</b>				
red	420 110 54	420 110 75	420 110 67	420 110 68
yellow	420 310 54	420 310 75	420 310 67	420 310 68
<b>Wall mounting</b>				
red	422 110 54	422 110 75	422 110 67	422 110 68
yellow	-	422 310 75	422 310 67	422 310 68

**ACCESSORIES:**

Adaptor for tube mounting, plastic, for tube Ø 25 mm	975 420 01
Base for tube Ø 25 mm, plastic, incl. rubber seal	975 840 90
Base for tube Ø 25 mm, metal, incl. rubber seal	975 840 91
Tube Ø 25 mm, all anodized aluminium	
100 mm	975 845 10
250 mm	975 840 25

**TECHNICAL DIAGRAMS:**

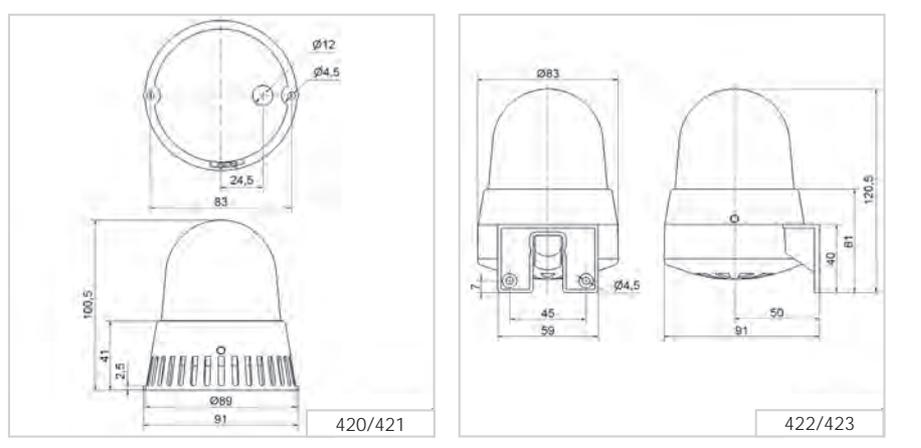

Signalisation index	
Continuous tone	4
Pulse tone	4
LED Permanent Light	3

CE EAC 110 g IP65 +50°C -20°C 24 V 92 dB PLC

Optical-audible combinations

