



Award winning design Winner of the iF product design award 2012




Quick and simple wall mounting without additional accessories thanks to integrated mounting bracket

**i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:**

<b>Dimensions (L x H x W):</b>	134 mm x 407 mm x 144 mm	
<b>Housing:</b>	PC/ABS-Blend, grey	
<b>Lens:</b>	PC, transparent	
<b>Connection:</b>	Screw terminal 0.5-1.5 mm <sup>2</sup>	
<b>Cable entry:</b>	Cable diameter max. 11 mm	
<b>Tone frequency:</b>	C. 110 Hz	
<b>Life duration:</b>	Up to 50,000 h (LED), up to 5,000 h (Horn)	
<b>Fixing:</b>	Wall mounting, integrated mounting bracket	
<b>Installation position:</b>	Sound outlet facing downwards	
<b>Voltage:</b>	24 V AC/DC	115-230 V AC*
<b>Current consumption MTS:</b>	55 mA	30 mA
<b>Current consumption LED:</b>	350 mA	100 mA
	230 mA (red)	80 mA (red)
red	<b>434 100 75</b>	<b>434 100 60</b>
yellow	<b>434 300 75</b>	<b>434 300 60</b>

\*Current consumption at 115 V

**1 2 3 TECHNICAL DIAGRAM:**

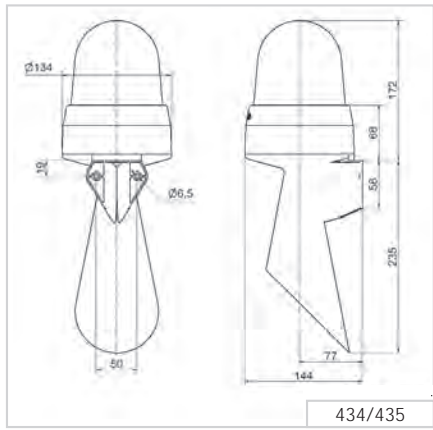

Optical-audible combinations

Signalisation index	
Horn	7
LED Permanent Light	5

