

AndonWIRELESS / Andon product

Transceiver 868MHz 24VDC KS71/72



Part No.: 862.000.03



MECHANICAL DATA	
Height	66 mm
Diameter	70 mm
Materials	PC
Housing colour	Black
Protection category	IP65
Connection	USB
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	90 g
Product weight	70 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Rated operational current	60 mA
Protection class	Protection class 3
Pollution degree	3
Radio range max.	500 m
Radio frequency min/max	868.000 MHz
Radio channels	6


APPROVAL DATA	
Conforms with CE	yes
WEEE	yes
Conforms with RED directive	Yes
Conforms with CCC	no
Conforms with UL	nein
Conforms with FCC	no
Conforms with IC	No
EAC Zertifikat vorhanden	no
Conforms with AS-I	no
Conforms with GL	no
Conforms with RoHS CN	no
Conforms with VdS	no

! For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

AndonWIRELESS / Andon product

Transceiver 868MHz 24VDC KS71/72

DRAWING

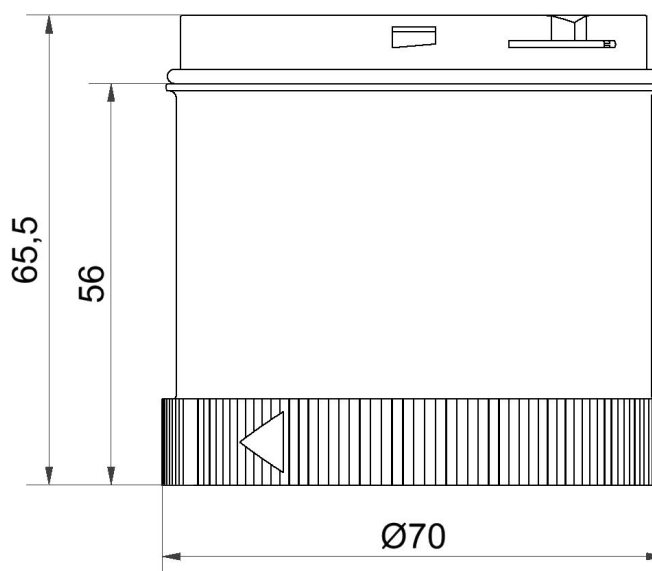

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.