



i TECHNICAL SPECIFICATIONS/ORDER SPECIFICATIONS:


Dimensions (L x H x W):	83 mm x 84 mm x 91 mm
Housing:	PC, PC/ABS-Blend, grey
Fixing:	Wall mounting
Installation position:	Sound outlet facing downwards
Connection:	Screw terminal 0.5 - 1.5 mm ²
Cable entry:	Cable diameter max. 9 mm
Tone type:	Selectable, see table
Tone frequency:	See table
Life duration:	> 5,000 hrs
Duty cycle:	100 %
Voltage:	24 V AC/DC
Current consumption:	≤ 80 mA
Order No.:	134 000 75

🎵 TONE TYPES AND FREQUENCIES:

8 selectable tones and adjustable sound output

Tone	Tone type
1	Horn tone (c. 110 Hz)
2	Continuous tone (c. 3.0 KHz)
3	1 Hz tone (c. 3.0 KHz)
4	20 Hz whistle tone (c. 3.0 KHz)
5	800-970 Hz rising @ 1 Hz
6	2400-2850 Hz rising @ 7 Hz
7	1200-500 Hz falling @ 1 Hz
8	Alternating tone 800 Hz + 1200 Hz @ 1Hz

📏 TECHNICAL DIAGRAM:

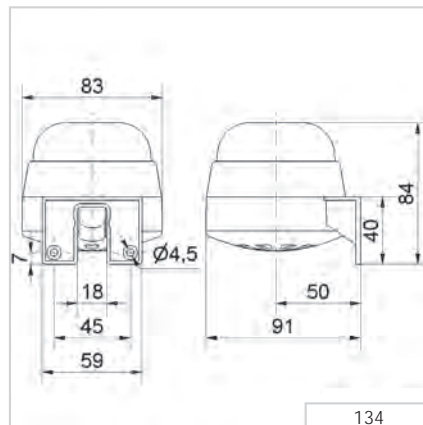

Signalisation index

Multi-tone sounder	7
--------------------	---

